


Mod[®] Electrolytic

C-ET1-50-MOD

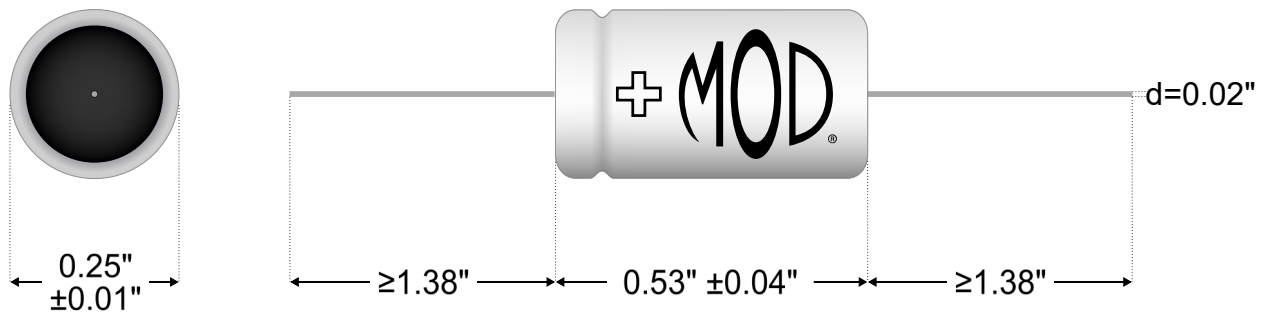

*drawing not to scale

Type	Axial Leaded Electrolytic
Capacitance	1 μ F
Rated Voltage (DC)	50 V
Tolerance	\pm 20%
Load Life	2000 hr at 105°C w/ 100% rated voltage
Surge Voltage (DC)	63 V
Operating Temperature	-25°C to +105°C
Leakage Current (after 2 min.)	\leq 3 μ A
Max. Dissipation Factor (120Hz)	10%
Max. Ripple Current (120Hz)	0.011 A at 105°C

