


# Mod<sup>®</sup> Electrolytic

## C-ET100-100-MOD

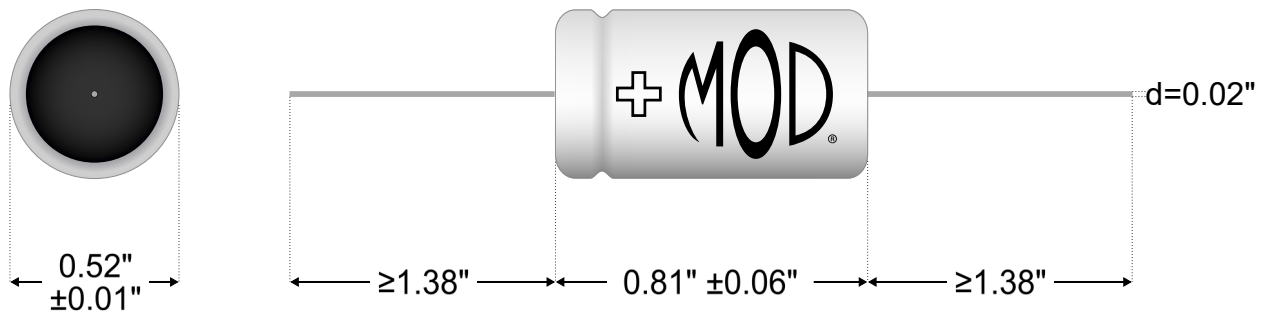

\*drawing not to scale

Type	Axial Leaded Electrolytic
Capacitance	100 $\mu$ F
Rated Voltage (DC)	100 V
Tolerance	$\pm 20\%$
Load Life	2000 hr at 105°C w/ 100% rated voltage
Surge Voltage (DC)	125 V
Operating Temperature	-25°C to +105°C
Leakage Current (after 2 min.)	$\leq 100 \mu$ A
Max. Dissipation Factor (120Hz)	10%
Max. Ripple Current (120Hz)	0.225 A at 105°C

