


Mod[®] Electrolytic

C-ET100-350-MOD

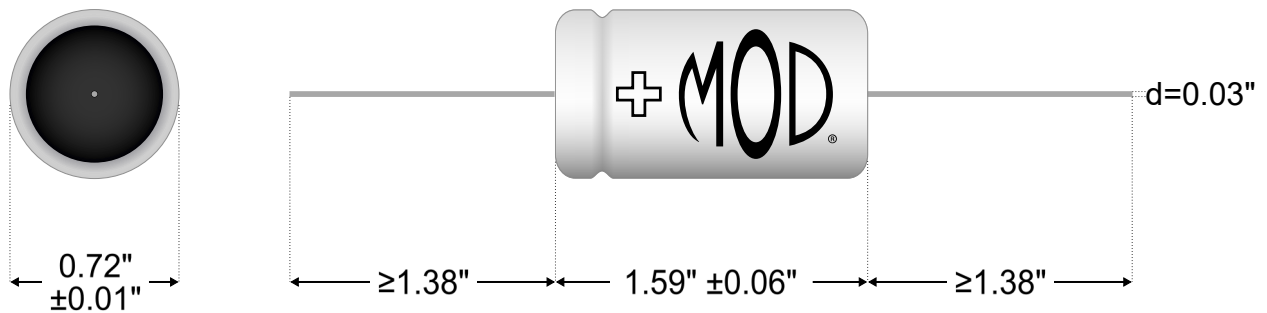

*drawing not to scale

Type	Axial Leaded Electrolytic
Capacitance	100 μ F
Rated Voltage (DC)	350 V
Tolerance	\pm 20%
Load Life	2000 hr at 105°C w/ 100% rated voltage
Surge Voltage (DC)	400 V
Operating Temperature	-25°C to +105°C
Leakage Current (after 2 min.)	\leq 700 μ A
Max. Dissipation Factor (120Hz)	24%
Max. Ripple Current (120Hz)	0.38 A at 105°C

