


# Mod<sup>®</sup> Electrolytic

## C-ET20-500-MOD

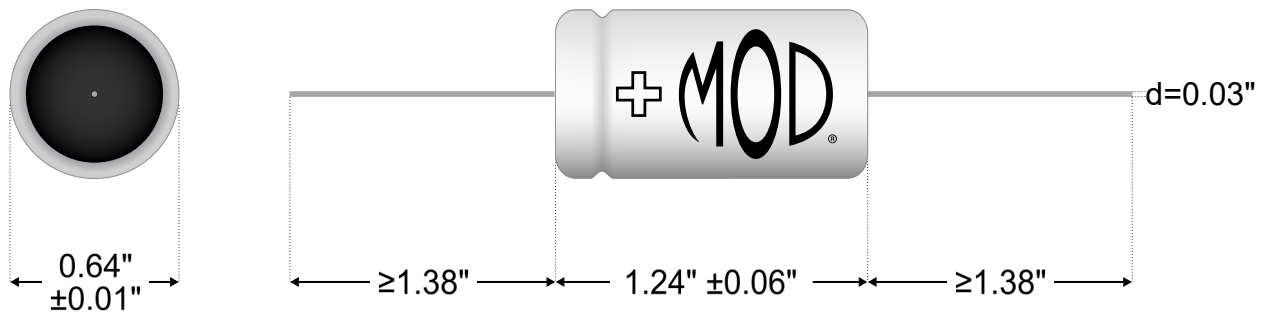

\*drawing not to scale

Type	Axial Leaded Electrolytic
Capacitance	20 $\mu$ F
Rated Voltage (DC)	500 V
Tolerance	$\pm$ 20%
Load Life	2000 hr at 105°C w/ 100% rated voltage
Surge Voltage (DC)	550 V
Operating Temperature	-25°C to +105°C
Leakage Current (after 2 min.)	$\leq$ 200 $\mu$ A
Max. Dissipation Factor (120Hz)	24%
Max. Ripple Current (120Hz)	0.145 A at 105°C

